


# PGM 14

## Technical Data

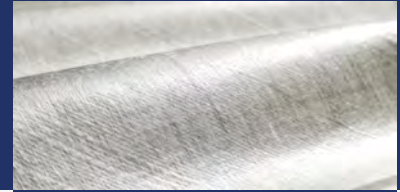

TenCate Polyfelt® PGM 14

**PGM 14** is a mechanically bonded paving fabric made from 100% PP continuous filaments. In conjunction with a bitumen layer it acts as a barrier to the ingress of water and delays the deterioration of the pavement.

**PGM 14** is characterised by optimum bitumen storage capacity and was especially developed for new asphalt road construction, rehabilitation of older roads and conforms to EN 15381. The main functions are stress relief (STR) and sealing (B). The product is used between asphalt layers, or applied directly on concrete surfaces or cement stabilised layers.

Properties	Standard	Unit	PGM 14			
Functions	EN 15381	-	STR + B			
Type of product	-	-	Mechanically bonded continuous filament nonwoven			
Raw Material	-	-	100% polypropylene, UV stabilized			
Tensile strength (md/cd)	EN ISO 10319	kN/m	9			
Elongation at break	EN ISO 10319	%	55			
Grab tensile strength	ASTM D 4632	N	520			
Grab elongation	ASTM D 4632	%	>50			
Bitumen retention*	EN ISO 15381	kg /m <sup>2</sup>	0.9			
*Bitumen required to saturate paving fabric only. Value does not indicate the bitumen application rate required for construction.						
E-Modulus		MPa	12,000			
Mass of paving fabric	EN ISO 9864	g/m <sup>2</sup>	140			
Melting point	EN ISO 3146	°C	165			
<b>Forms of Supply</b>						
Width		m	1.00	1.90	3.00	3.80
Length		m	150	150	150	150
Area		m <sup>2</sup>	150	285	450	570
Roll weight		kg	26	46	72	92
Rolls per pallet		-	12	available	as single	rolls
Roll diameter		m	0.50	0.50	0.50	0.50
Inner core diameter		m	0.12	0.12	0.12	0.12
<b>Recycling</b>			100% recyclable with conventional methods			

The values given are indicative and correspond to average values obtained in our laboratories and in testing institutes. The right is reserved to make changes without notice at any time.

The rolls must be kept in dry place! Installation guidelines must be observed!

### TENCATE GEOSYNTHETICS AUSTRIA GMBH

Schachermayerstr. 1B Tel. + 43 732 6983 0, Fax + 43 732 6983 5353  
A-4021 Linz, Austria service.at@tencate.com, www.tencategeosynthetics.com

**BeNeLux** Tel. + 31 546 544 811 service.nl@tencate.com  
**Central Eastern Europe** Tel. + 43 732 6983 0 service.at@tencate.com  
**Czech Republic** Tel. + 420 2 2425 1843 service.cz@tencate.com  
**France / Africa** Tel. + 33 1 34 23 53 63 service.fr@tencate.com  
**Germany** Tel. + 49 6074 3751 50 service.de@tencate.com  
**Italy** Tel. + 39 0362 34 58 11 service.it@tencate.com  
**Near Middle East** Tel. + 971 5048 10557 service.nme@tencate.com

**Poland** Tel. + 48 12 268 8375 service.pl@tencate.com  
**Romania** Tel. + 40 21 322 06 08 service.ro@tencate.com  
**Scandinavia / Baltics** Tel. + 45 4485 7474 service.dk@tencate.com  
**Spain / Portugal** Tel. + 34 607 499 962 service.es@tencate.com  
**UK / Ireland** Tel. + 44 1952 588 066 service.uk@tencate.com



0799-CPD-22



**Q** qualityaustria  
**SYSTEM CERTIFIED**  
ISO 9001:2008 NR.00631/0

503008 | 08.2013 | GWSF

Protective Fabrics  
Space Composites  
Aerospace Composites  
Advanced Armour

Geosynthetics  
Grass

 **TENCATE**  
materials that make a difference